


INNOVATION FIRST
SUPREMA
INTELLIGENT SECURITY
SYSTEMS

■ **Flap Gate**

Model : SP-600FS (Single motor machine)
& SP-600FD (Double motor machine)

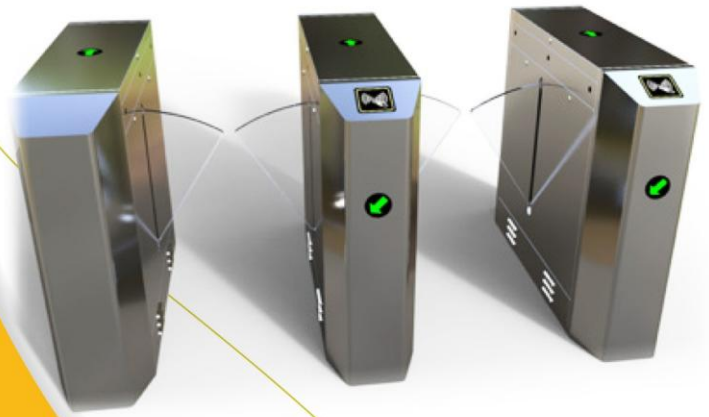

Features:

- Problem self-recovery and corrective measure ability, convenient maintain and adjust
- Motherboard with high clean sound read chips which could broadcast in light of user's requirement
- Human base model indication function, real time displaying, improve the passing rate and convenient maintain
- Automatic counting indicating passenger's number
- Resetting automatically, auto cancel the pass through and closed barrier in case nothing pass the channel in a setting time
- Anti pinch function with UPS to satisfy firefighter requires, ensure user's safe
- Break-in ,tail ,over-pass and reverse alert function in order to keep orderliness and effective manage
- Standard input/output port, meanwhile leaving a port space for installing RS485 communication, connect and manage the integrated systems through the remote PC.
- Super combination capacity, adjustable model on site , adjustable speed of barrier slide ,Open signal with memory or with out set function



Suprema Security Europe
Tom Welsstraat 6. 1336CP. Almere. Netherlands

suprema-security.com
info@suprema-security.com

Technical parameters

Power voltage	AC220±10%,50Hz	Drive voltage	DC24V 5A
Dimension (Customized Optional)	1200*300*980m	Communication port	RS485
(Operation condition)	-15℃ ~ +60℃	Material:	SS304 Cover thickness:1.5mm Cabinet thickness:1.2mm
Relative humidity	≤95% None-condensation	Open direction	Single and Double (optional)
Input signal	12v DC level or 12v pulse>100ms	Gate opening and closing time	0.5s
Working Current	≤2000mA	Number of infrared sensors :	5 pairs
Length of the flap	260mm	Width of passage	≤600mm
Pass speed	≤30 person/minutes	Service life	≥3 million times

